




LISTED 53ZL
 Flammable And Combustible
 Liquid Tank Accessory

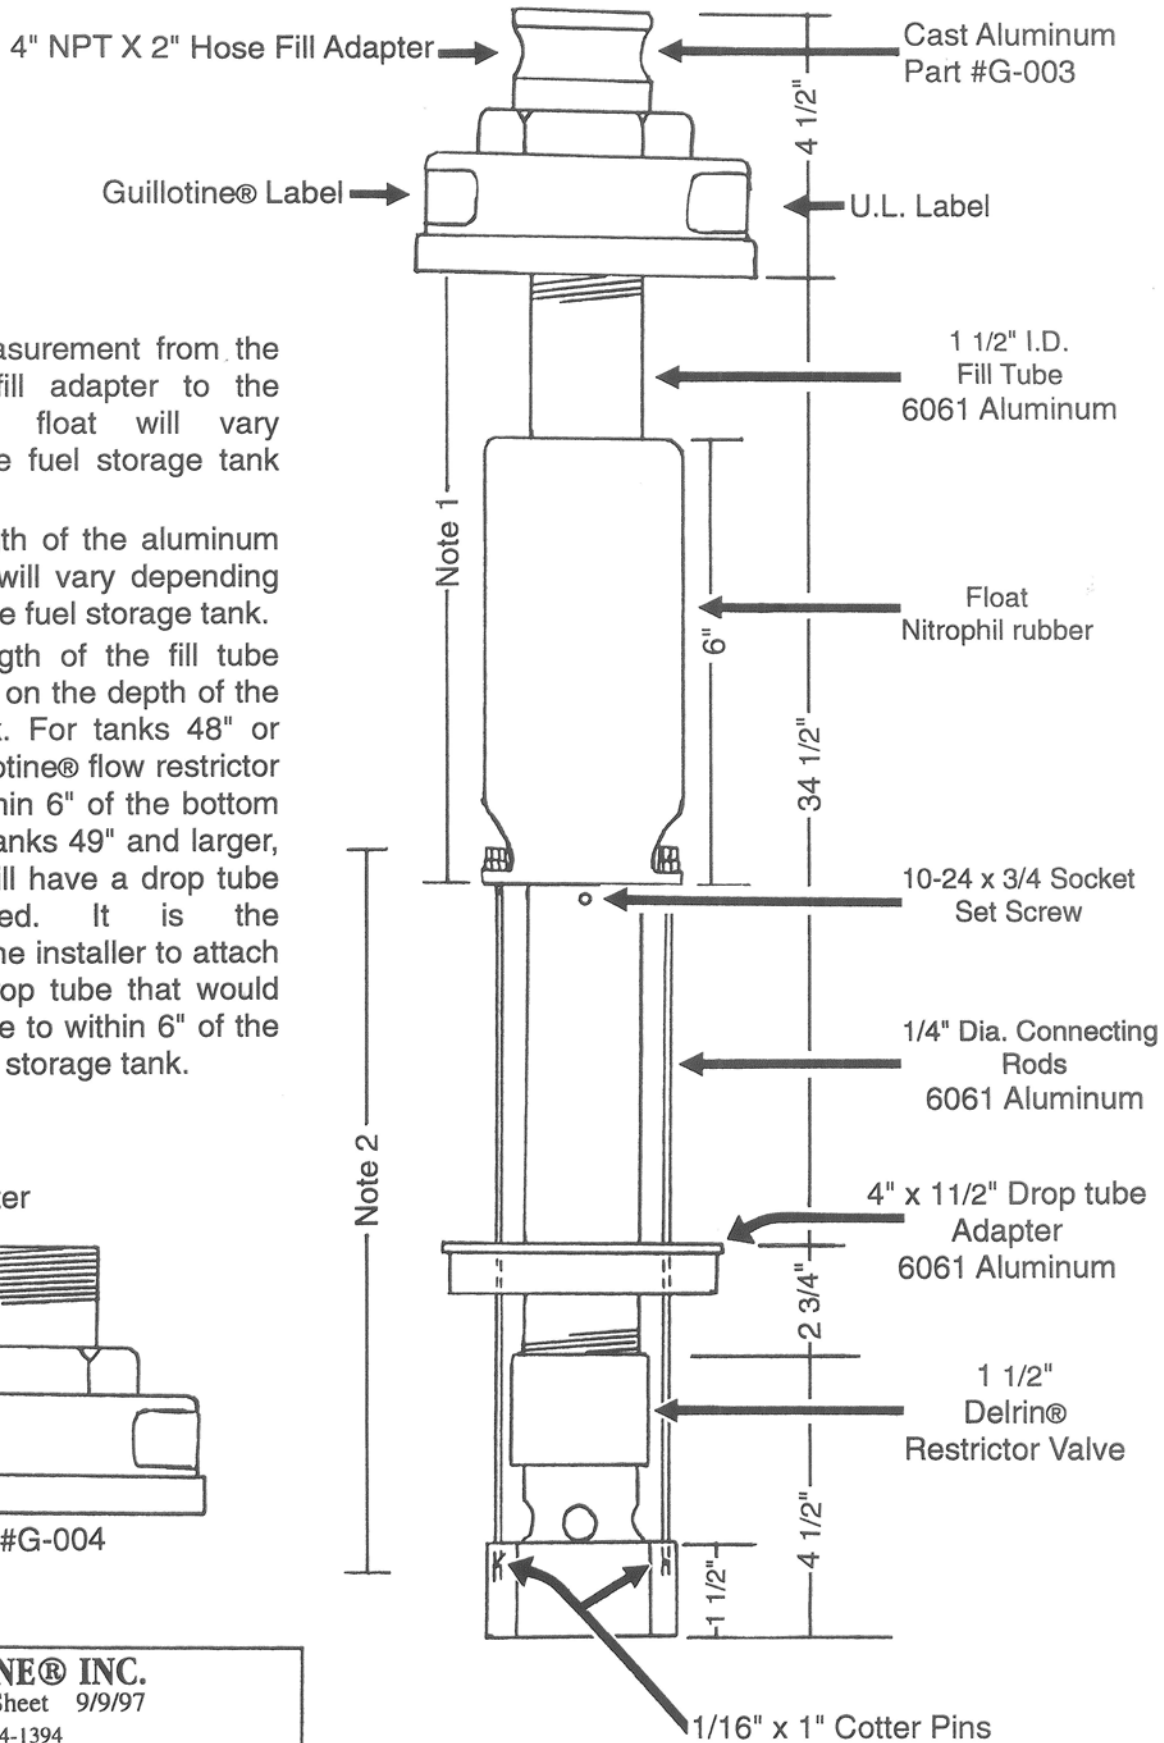


Note 1: The measurement from the bottom of the fill adapter to the bottom of the float will vary depending on the fuel storage tank design and size.

Note 2: The length of the aluminum connecting rods will vary depending on the depth of the fuel storage tank.

Note 3: The length of the fill tube varies depending on the depth of the fuel storage tank. For tanks 48" or smaller, the Guillotine® flow restrictor will extend to within 6" of the bottom of the tank. For tanks 49" and larger, the Guillotine® will have a drop tube adapter attached. It is the responsibility of the installer to attach a length of 4" drop tube that would extend the fill tube to within 6" of the bottom of the fuel storage tank.

Threaded Fill Adapter
 4" FNPT X
 2" MNPT
 Fill Adapter
 (Ductile Iron)

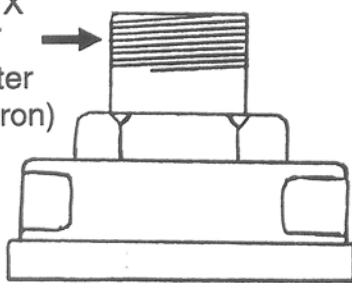

Part #G-004

GUILLOTINE® INC.
 Specification Sheet 9/9/97
 (800) 824-1394
 U.S. PAT. 5,235,999
 CANADIAN PAT. 2,083,585